


SPECIFICATIONS

-  Bags & Bulky Waste

-  EN 840-1 | 120-360L

-  EN 840-2 | 500-770L

-  EN 840-2 | 1000-1200L

-  EN 840-3 | 770-1300L

Type	OL16W	OL17W	OL19W	OL20W	OL21W	OL23W	OL27W
GVW (tonne)	19	19-26	19-26	26	26	26-32	26-32
Body volume (m ³)	15,6	16,6	18,6	20	21,4	23,2	26,5
Recommended wheelbase (mm)	≈ 3700/ 3900	≈ 3700/ 3900	≈ 3300/ 3500	≈ 3500/ 3700	≈ 3700/ 3900	≈ 3900/ 4100	NC
Body weight (kg)	5911	6032	6162	6220	6340	6502	6780
Body length (mm)	5975	6625	6785	7225	7625	8325	NC

- Also available as High Plus version
- Volumes from 10m³ to 29m³

Olympus Press body	Width	Bin lift	
Maximum width outside dimensions (mm)	2200 / 2530	Cycle time 2 wheeled	7 (s)
Throw in width (mm)	1500 / 1800	Cycle time 4 wheeled	10 (s)
Volume rear loader with hopper plate at 1.050mm (m ³)	1.5	Lifting capacity 2 wheeled	150 (kg)
Volume rear loader with hopper plate at 1.650mm (m ³)	2.6	Lifting capacity 4 wheeled	750 (kg)
Volume hopper (m ³)	2.8	Hydraulic operated hopper plate	●
Cycle time press plate (s)	18	Footboard	■
Processing speed (m ³ /min)	9.2		

- Standard / ■ Optionnel

* Containers with different sizes on request

* All dimensions and weights with a tolerance of ± 3%



TERBERG ENVIRONMENTAL

Newtonstraat 2, 3401JA. IJsselstein, The Netherlands

T +44 (0)1925 458 500, E info@terbergenvironmental.com, I www.terbergenvironmental.com

Terberg Environmental Holding BV reserve the right to change the specification or design of our equipment at any time without prior notification.

OLYMPUS EUROTRADE



The Olympus EuroTRADE... synonymous with quality and reliability. The Olympus EuroTRADE provides a class leading waste & recycling collection solution with the capability to safely handle a wide range of containers with its robust rear mounted lift system. With maximum operational flexibility in mind, the Olympus EuroTRADE design offers some fantastic features and efficiency savings benefits.



THE EUROTRADE FROM TERBERG. MAXIMUM PERFORMANCE, MINIMAL FUSS.

- Short overhang of 40cm to optimise weight distribution
- Steep container tipping angle ensures a full container discharge
- Manual operated folding hopper plate provides full width opening
- Low rake rail which is ideal for collecting of loose bags and bulky items
- Container lid catcher mechanism cleverly designed for all containers
- Footboards and handrail system compliant with EN 1501-1
- Innovative Skip-container pick up system



Full width manual Hopper plate.

Allows safe and easy loading.

Superb tip angle of 55 degrees.

The high tip angle ensures materials are discharged from containers consistently.


Smooth-sided one-piece construction.

Easy to clean and perfect for advertising campaigns.

Safe container pick up

Designed with a unique system for container



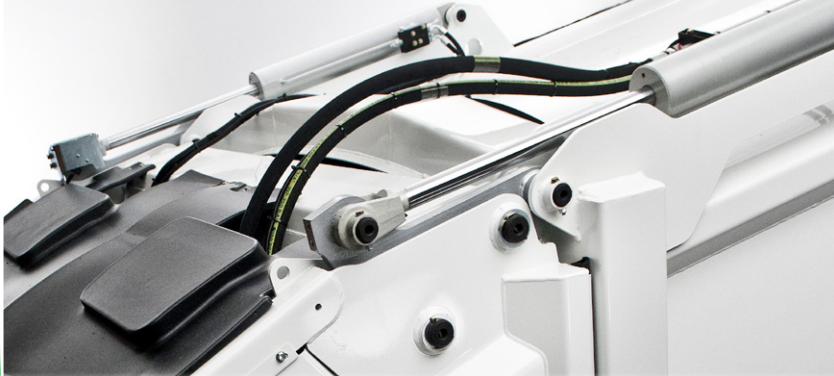

LARGE SIDE MOUNTED INSPECTION DOOR TO THE SIDE OF THE REFUSE BODY.

This allows easy access for cleaning and safe maintenance work.
A foldable step with handles is optionally available.

Roof mounted hopper lift rams for opening and closing of the press mechanism.

Pour commander ouverture et fermeture de porte. Le positionnement des vérins sur le toit les protège des éventuelles dégradations lors du vidage des déchets.

LControl panel with monitor reveals all possibilities at a glance.

The driver can simply choose which function they require on screen.
Discharging of the vehicle body can be performed from the safety of the cab.



Quick pick-up.

Technique pick-up
tractors.

Optimum waste processing capacity.

The quick working press mechanism
guarantees a high productivity even
with larger containers.

Optimised overhang of 40 cm.

Some clever thinking with weight
distribution in mind resulted in a
short, optimal overhang.

Safe standing.

The Olympus EuroTRADE
footboards are fully compliant with
EN1501-1 to give a perfect and safe
standing position.

