

OLYMPUS EUROTRADE WLS

SPECIFICATIONS

Type	OL16W	OL17W	OL19W	OL20W	OL21W	OL23W	OL27W
GVW (tonne)	19	19-26	19-26	26	26	26-32	26-32
Body volume (m3)	15,6	16,6	18,6	20	21,4	23,2	26,5
Recommended wheelbase (mm)	≈ 3700/ 3900	≈ 3700/ 3900	≈ 3300/ 3500	≈ 3500/ 3700	≈ 3700/ 3900	≈ 3900/ 4100	NC
Body weight (kg)	5911	6032	6162	6220	6340	6502	6780
Body length (mm)	5975	6625	6785	7225	7625	8325	NC


- Also available as High Plus version
- Volumes from 10m³ to 29m³

- Bags & Bulky Waste
- Bale clamp
- EN 840-1 120-360L
- EN 840-2 500-770L
- EN 840-2 1000-1200L
- Skip container 5-18m³

Olympus Press body	Width	Bin lift	
Maximum width outside dimensions (mm)	2530	Cycle time 2 wheeled	7 (s)
Throw in width (mm)	1800	Cycle time 4 wheeled	10 (s)
Volume rear loader with hopper plate at 1.050mm (m ³)	1.5	Lifting capacity 2 wheeled	150 (kg)
Volume rear loader with hopper plate at 1.650mm (m ³)	2.6	Lifting capacity 4 wheeled	750 (kg)
Volume hopper (m ³)	2.8	Winch capacity Skip-containers	4000 (kg)
Cycle time press plate (s)	18	Hydraulic operated hopper plate	■
Processing speed (m ³ /min)	9.2	Footboard	■
		Bale clamp	■

- Standard / ■ Optionnel
- * Containers with different sizes on request
- * Dimensions et poids avec une tolérance +/- 3%



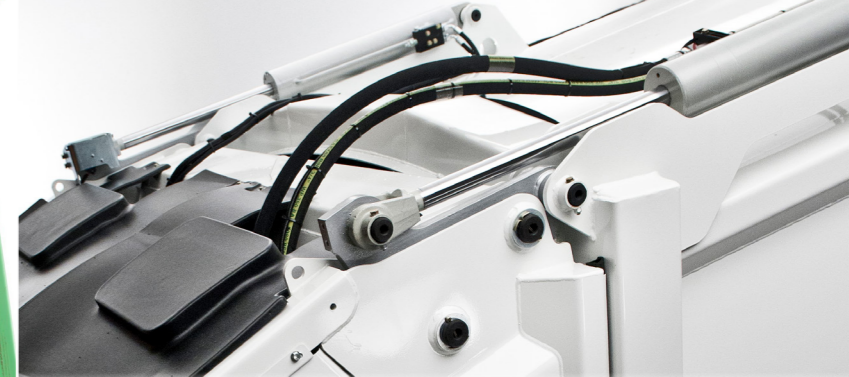

**THE EUROTRADE-WLS FROM TERBERG.
WMAXIMUM PERFORMANCE, MINIMAL FUSS.**

- Short overhang of 40cm to optimise weight distribution
- Steep container tipping angle ensures a full container discharge
- Manual operated folding hopper plate provides full width opening
- Low rave rail which is ideal for collecting of loose bags and bulky items
- Container lid catcher mechanism cleverly designed for all containers
- Footboards and handrail system compliant with EN 1501-1
- Innovative Skip-container pick up system



LARGE SIDE MOUNTED INSPECTION DOOR TO THE SIDE OF THE REFUSE BODY.

This allows easy access for cleaning and safe maintenance work. A foldable step with handles is optionally available.

Roof mounted hopper lift rams for opening and closing of the press mechanism.

The risk of damage is significantly reduced during emptying thanks to the roof mounted hopper lift rams and one-piece body hopper seal.

Control panel with monitor reveals all possibilities at a glance.

The driver can simply choose which function they require on screen. Discharging of the vehicle body can be performed from the safety of the cab.



Full width manual Hopper plate.

Superb tip angle of 55 degrees.

Smooth-sided one-piece construction.

Safe container pick-up.

Optimum waste processing capacity.

Optimised overhang of 40 cm.

Safe standing.

Allows safe and easy loading.

The high tip angle ensures materials are discharged from containers consistently.

Easy to clean and perfect for advertising campaigns.

Designed with a unique pick-up system for containers.

The quick working press mechanism guarantees a high productivity even with larger Skip-containers.

Some clever thinking with weight distribution in mind resulted in a short, optimal overhang.

The Olympus EuroTRADE-WLS footboards are fully compliant with EN1501-1 to give a perfect and safe standing position.

